



www.kanetest.ca

Differential Pressure Meter KANE3500

mbar

Pa

hPa

kPa

mmHg

mmH₂O

inH₂O

PSI



```
LOG          01
TIME 15:55 12/05/21
.....
Let-by Test

PRS_1 mbar   10.15
PRS_2 mbar   10.10
Let-by Mins   1.00
.....
Tightness Test

PRS_3 mbar   20.17
PRS_4 mbar   20.12
ΔPRS mbar     0.05
STABIL'N Mins 1:00
TIGHTN'S Mins 2:00
Customer
.....
Appliance
.....
Ref.
.....
```

Headers can be
customised by the user.

• 4 VERSIONS AVAILABLE

KANE3500-1 ± 1 psi / 80 mbar
KANE3500-5 ± 5 psi / 400 mbar
KANE3500-15 ± 15 psi / 1040 mbar
KANE3500-30 ± 30 psi / 2070 mbar

- Resolution to 0.1 pascal / 0.001 mbar on the KANE3500-1
- Temperature compensated for superior accuracy
- Switchable between high and low resolution.
- Switchable between: mbar, Pa, hPa, kPa, mmHg, mmH₂O, inH₂O and PSI
- Data hold and max/min recording
- Printouts include date/time and user details





Technical Specifications KANE3500

KANE3500-1 Specifications

Nominal Pressure Range	Measured Range	Resolution	Accuracy
± 80 mbar	± 0.2 mbar ± 1 mbar ± 80mbar	0.001 mbar 0.001 mbar 0.01 mbar	±0.005 mbar ±0.03 mbar ± 3% of reading

KANE3500-2 Specifications

Nominal Pressure Range	Measured Range	Resolution	Accuracy
± 160 mbar	± 0.2 mbar ± 19.999 mbar ± 160 mbar	0.003 mbar 0.003 mbar 0.01 mbar	±0.02 mbar ±0.05 mbar ± 3% of reading

KANE3500-5 Specifications

Nominal Pressure Range	Measured Range	Resolution	Accuracy
± 400 mbar	± 300 mbar ± 400 mbar	0.01 mbar 0.1 mbar	±0.05 mbar ± 3% of reading

KANE3500-15 Specifications

Nominal Pressure Range	Measured Range	Resolution	Accuracy
± 1040 mbar	± 310 mbar ± 1040 mbar	0.01 mbar 0.1 mbar	± 10 mbar ± 3% of reading

KANE3500-5 Specifications

Nominal Pressure Range	Measured Range	Resolution	Accuracy
± 400 mbar	± 300 mbar ± 400 mbar	0.01 mbar 0.1 mbar	±0.05 mbar ± 3% of reading


KANE3500-15 Specifications

Nominal Pressure Range	Measured Range	Resolution	Accuracy
± 1040 mbar	± 310 mbar ± 1040 mbar	0.01 mbar 0.1 mbar	± 10 mbar ± 3% of reading

KANE3500-30 Specifications

Nominal Pressure Range	Measured Range	Resolution	Accuracy
± 2070 mbar	± 1076 mbar ± 2070 mbar	0.1 mbar 1 mbar	± 10 mbar ± 3% of reading

Max. Overrange for all models is 5 times nominal range.

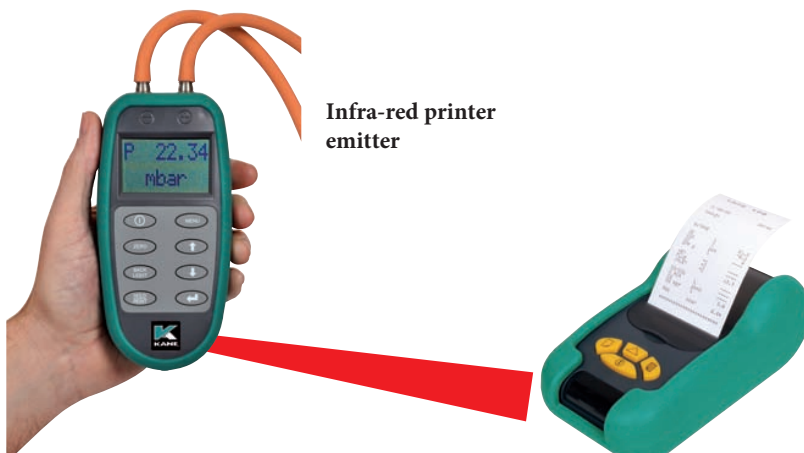

Infra-red printer emitter

Temperature compensated for superior accuracy

All KANE3500 models are temperature compensated to minimise the “drift” in readings which can occur when electronic manometers are subject to temperature changes, e.g. when taken from a cold van into a warm building.

KANE3500-1 has high accuracy at low pressures

At low pressures the KANE3500-1 has a resolution of 0.001mbar and an accuracy of ± 0.005mbar – significantly better than any standard manometer. The KANE3500-1 is suitable for difficult applications such as ‘flue draft’ measurement and measuring the differential pressure of gas/air ratio valves on modern high efficiency boilers. The pressures in both these applications pulsate so the ‘smooth’ feature found on all the KANE3500 series can be used to damp the readings.

Manual logging and auto logging

All models can log up to 250 readings manually or automatically. The user can adjust the logging interval.

Let-by, Stabilisation and Tightness Tests

The KANE3500-1 and -2 can both perform timed Let-by, Stabilisation and Tightness Tests which are automatically logged in the memory. The user can adjust the duration of each test.

Printouts

All models have an infra-red output to an optional printer, (KMIRP or similar). ‘Live’, ‘held’ and ‘logged’ readings can be printed. Printouts include date, time and a ‘header’ which can be set by the user.

The KANE3500 series all have an integral protective boot and are supplied with pouch, connecting hose, calibration report, battery and manual.

PLEASE NOTE THESE
INSTRUMENTS COME IN
2 COLORWAYS IN
CANADA

Warranty

All Kane International Limited products are warranted for 12 months from the date of purchase. This warranty covers any defects in materials or manufacturing.

Kane International Limited specialize in the design, manufacture and marketing of electronic instruments for monitoring and optimizing both energy usage and emissions from energy processes. Our Policy is to continuously develop and improve our products and so we reserve the right to change any part of our product specifications without prior notice.